EVF Batteries

SHENZHEN UBEST POWER CO.,LTD

Overview

EVF Series uses latest AGM technology with longer cycle life, up to 700 cycles 80% DOD,suitable for large current discharge and deep cycle applications. It can be used in EV, Mixture electrical vehicle, sightseeing car, golf car, patrol car, electrical flat car, electrical tractor,electric sweeping machine,electric pallet truck and etc.


Characteristics

- Good large current discharge performance
- Super long voyage ability
- Strong motive power
- High durability
- High reliability and safety
- Maximum charging effect
- Low self-discharge rate

Applications

- Golf and Electric Vehicles
- Aerial Lifts and Fork Lifts
- Electric pallet truck
- Electric sweeping machine



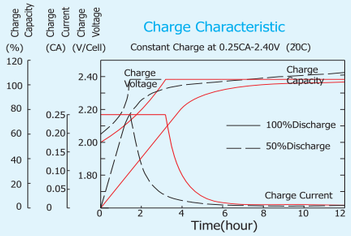

General Specifications

Model	Voltage (V)	Capacity (AH)	Dimension (±2mm) Length	Wide	High	Total Height	Weight (kg)	Discharge Capacity(min)
6-EVF-30	12	30	220	93	175	175	9.6	10A ⩾ 210
6-EVF-32	12	32	267	77	170	172	9.6	10A ⩾ 210
6-EVF-35	12	35	267	77	170	172	10.2	10A ⩾ 230
6-EVF-38	12	38	222	106	175	175	11.0	10A ⩾ 265
6-EVF-45	12	45	223	120	175	177	12.6	10A ⩾ 315
6-EVF-48	12	48	223	120	175	177	13.6	10A ⩾ 330
6-EVF-52	12	50	223	135	176	178	14.2	10A ⩾ 345
6-EVF-55	12	55	223	150	176	178	15.6	10A ⩾ 380
6-EVF-60	12	60	260	150	178	178	17.5	10A ⩾ 400
6-EVF-70	12	70	265	166	215	218	24.5	23.3A ⩾ 190
6-EVF-80	12	80	265	166	215	175	28.2	26.7A ⩾ 195
6-EVF-100	12	100	327	172	215	218	30.0	33.4A ⩾ 180
6-EVF-100A	12	100	327	172	215	218	32.5	33.4A ⩾ 192
6-EVF-110	12	110	510	167	165	168	36.5	36.7A ⩾ 190
6-EVF-120	12	120	405	175	210	215	37.2	40A ⩾ 180
6-EVF-120A	12	120	405	170	240	243	43.2	40A ⩾ 195
6-EVF-135	12	135	341	182	264	267	45.0	45A ⩾ 193
6-EVF-150	12	150	483	170	241	245	49.5	50A ⩾ 195
6-EVF-200	12	200	525	240	219	222	64.5	66.7A ⩾ 198
6-EVF-65	12	65	348	165	180	180	20.7	13A ⩾ 305
3-EVF-200	6	200	260	184	274	278	35.5	66.7A ⩾ 198
3-EVF-200T	6	200	330	180	222	225	33.5	66.7A ⩾ 190
4-EVF-150	8	150	260	180	280	285	36.5	50A ⩾ 190

EVF Batteries

SHENZHEN UBEST POWER CO.,LTD



3-EVF-200

Voltage:6V
Capacity:200Ah(3hr)
Approx. Weight:35kg
Dimensions:261*180*270*273mm
Terminal:M8
Starting current ≤300A
Maximum speed current: ≤100A



4-EVF-150

Voltage:8V
Capacity:150Ah(3hr)
Approx. Weight:36.5kg
Dimensions:262*182*280*280mm
Terminal:M8
Starting current ≤225A
Maximum speed current: ≤75A



6-EVF-60

Voltage:12V
Capacity:60Ah(3hr)
Approx. Weight:20kg
Dimensions:262*165*170*170mm
Terminal:M6
Starting current ≤90A
Maximum speed current: ≤30A



6-EVF-70

Voltage:12V
Capacity:70Ah(3hr)
Approx. Weight:24kg
Dimensions:260*168*210*212mm
Terminal:M6
Starting current ≤102A
Maximum speed current: ≤34A



6-EVF-80

Voltage:12V
Capacity:80Ah(3hr)
Approx. Weight:26kg
Dimensions:260*168*210*212mm
Terminal:M6
Starting current ≤120A
Maximum speed current: ≤40A



6-EVF-100

Voltage:12V
Capacity:100Ah(3hr)
Approx. Weight:35kg
Dimensions:330*175*214*220mm
Terminal:M8
Starting current ≤150A
Maximum speed current: ≤50A



6-EVF-120

Voltage:12V
Capacity:120Ah(3hr)
Approx. Weight:41kg
Dimensions:406*172*216*221mm
Terminal:M8
Starting current ≤180A
Maximum speed current: ≤60A



6-EVF-150

Voltage:12V
Capacity:150Ah(3hr)
Approx. Weight:52kg
Dimensions:480*170*236*236mm
Terminal:M8
Starting current ≤225A
Maximum speed current: ≤75A